


**PR14044** [🔗](#)

直线循环滚柱轴承组件

直线滚珠轴承，英制安装尺寸，PR

技术信息

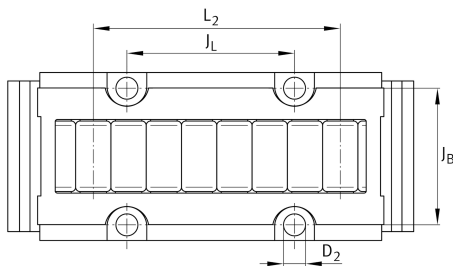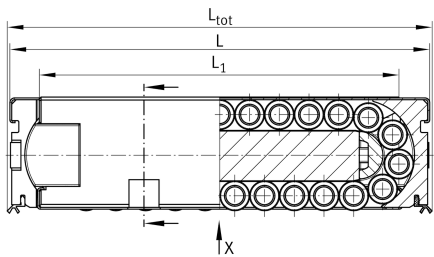

主要尺寸和性能数据

L	68.5 mm	
B	25.4 mm	宽度
H	19.1 mm	高度
C	44,000 N	Load capacity Dynamic
C ₀	76,000 N	Load capacity static
≈m	0.202 kg	重量

安装尺寸

L ₁	54.6 mm	
J _B	20.6 mm	Mounting Dimension
Tol J _B	±0,1	Tolerance
J _L	25.5 mm	Mounting Dimension
Tol J _L	±0,1	Tolerance
H ₁	0.1 mm	
L ₂	42 mm	
L _W	10 mm	
H ₄	14.8 mm	
K ₃	M3	Size thread K3
K3 M _A	1.8 Nm	Tightening Torque fixing screws
D ₂	3.65 mm	

Related products

VUSZ12044-A	Adjustment gib
UG6628, UGN6628, UZ6628, UZN6628, UFG3210, UFB4710	suitable Guide Rail