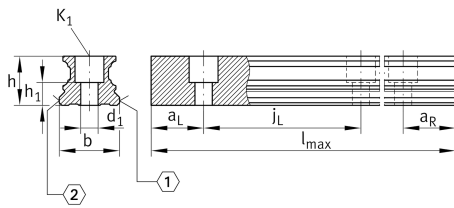
**TKVD45** **修形轨道**

直线循环滚珠轴承单元和四列直线循环滚珠导轨组件的导轨

技术信息**主要尺寸和性能数据**

h	34.2 mm	Height
b	45 mm	Width
Tol b	-0.005 mm	Upper tolerance
Tol b	-0.035 mm	Lower tolerance
≈m	9.2 kg/m	重量

安装尺寸

K ₁	M12	Thread
K1 M _A	140 Nm	Tightening torque
d ₁	13.4 mm	Bore diameter

尺寸

l _{max}	5,985 mm	Max length single piece guideway
a _{L max}	94 mm	Distance
a _{L min}	20 mm	Distance
a _{R max}	94 mm	Distance
a _{R min}	20 mm	Distance
j _L	105 mm	Increment
h ₁	15.7 mm	length
Tol h ₁	0.5 mm	Upper tolerance
Tol h ₁	-0.5 mm	Distance Distance

附加信息

	KWVE45-B..	usable carriage(s)
	KUVE45-B..	usable linear systems