


**TSX35-E-U** [↗](#)

修形轨道

技术信息

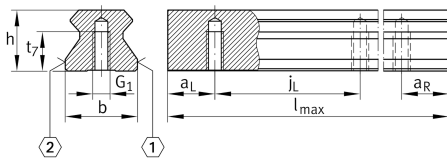

主要尺寸和性能数据

h	30 mm	Height
b	34 mm	Width
Tol b	-0.005 mm	Upper tolerance
Tol b	-0.035 mm	Lower tolerance
≈m	5.9 kg/m	重量

安装尺寸

G ₁	M8	Fixing screws (DIN ISO 4762-12.9)
G1 M _A	41 Nm	Tightening torque

尺寸

l _{max}	6,000 mm	Max length single piece guideway
a _{L min}	20 mm	Distance
a _{L max}	31 mm	Distance
a _{R min}	20 mm	Distance
a _{R max}	31 mm	Distance
j _L	40 mm	Increment
t ₇	15 mm	Thread length

附加信息

RWU35-E-...; RWU35-F-...	usable carriage(s)
RUE35-E-...; RUE35-F-...	Usable linear systems