


**TSX65-E-U** [↗](#)

修形轨道

## 技术信息

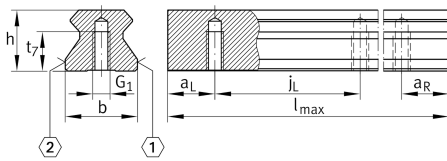

## 主要尺寸和性能数据

h	53.8 mm	Height
b	63 mm	Width
Tol b	-0.005 mm	Upper tolerance
Tol b	-0.035 mm	Lower tolerance
≈m	19.5 kg/m	重量

## 安装尺寸

G <sub>1</sub>	M16	Fixing screws (DIN ISO 4762-12.9)
G1 M <sub>A</sub>	340 Nm	Tightening torque

## 尺寸

l <sub>max</sub>	6,000 mm	Max length single piece guideway
a <sub>L min</sub>	20 mm	Distance
a <sub>L max</sub>	61 mm	Distance
a <sub>R min</sub>	20 mm	Distance
a <sub>R max</sub>	61 mm	Distance
j <sub>L</sub>	75 mm	Increment
t <sub>7</sub>	25 mm	Thread length

## 附加信息

RWU65-E-...; RWU65-F-...	usable carriage(s)
RUE65-E-...; RUE65-F-...	Usable linear systems