


**TSX65-E**

修形轨道

技术信息

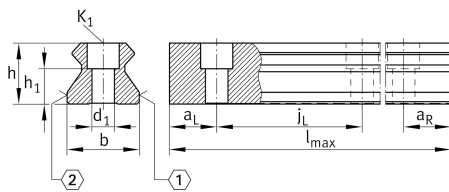

主要尺寸和性能数据

| | | |
|-------|-----------|-----------------|
| h | 53.8 mm | Height |
| b | 63 mm | Width |
| Tol b | -0.005 mm | Upper tolerance |
| Tol b | -0.035 mm | Lower tolerance |
| ≈m | 19.5 kg/m | 重量 |

安装尺寸

| | | |
|-------------------|--------|-----------------------------------|
| K ₁ | M16 | Fixing screws (DIN ISO 4762-12.9) |
| d ₁ | 18 mm | bore diameter |
| K1 M _A | 340 Nm | Tightening torque |

尺寸

| | | |
|--------------------|----------|----------------------------------|
| l _{max} | 6,000 mm | Max length single piece guideway |
| a _{L min} | 20 mm | Distance |
| a _{L max} | 61 mm | Distance |
| a _{R min} | 20 mm | Distance |
| a _{R max} | 61 mm | Distance |
| j _L | 75 mm | Increment |
| h ₁ | 28.8 mm | Length |
| Tol h ₁ | 0.5 mm | Upper tolerance |
| Tol h ₁ | -0.5 mm | Lower tolerance |

附加信息

| | |
|------------------------------|-----------------------|
| RWU65-E-...; RWU65- F-... | usable carriage(s) |
| RUE65-E-...; RUE65- F-... | Usable linear systems |