


**TSX35-E**

修形轨道

## 技术信息

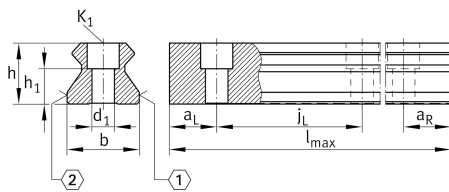

## 主要尺寸和性能数据

h	30 mm	Height
b	34 mm	Width
Tol b	-0.005 mm	Upper tolerance
Tol b	-0.035 mm	Lower tolerance
≈m	5.9 kg/m	重量

## 安装尺寸

K <sub>1</sub>	M8	Fixing screws (DIN ISO 4762-12.9)
d <sub>1</sub>	9 mm	bore diameter
K1 M <sub>A</sub>	41 Nm	Tightening torque

## 尺寸

l <sub>max</sub>	6,000 mm	Max length single piece guideway
a <sub>L min</sub>	20 mm	Distance
a <sub>L max</sub>	31 mm	Distance
a <sub>R min</sub>	20 mm	Distance
a <sub>R max</sub>	31 mm	Distance
j <sub>L</sub>	40 mm	Increment
h <sub>1</sub>	17.5 mm	Length
Tol h <sub>1</sub>	0.5 mm	Upper tolerance
Tol h <sub>1</sub>	-0.5 mm	Lower tolerance

## 附加信息

RWU35-E-...; RWU35- F-...	usable carriage(s)
RUE35-E-...; RUE35- F-...	Usable linear systems