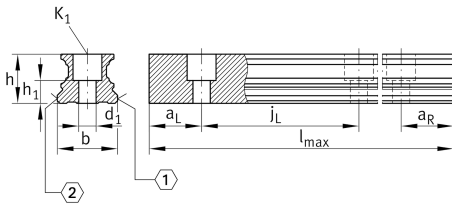
**TKVD35** **修形轨道**

直线循环滚珠轴承单元和四列直线循环滚珠导轨组件的导轨

**技术信息****主要尺寸和性能数据**

h	27 mm	Height
b	34 mm	Width
Tol b	-0.005 mm	Upper tolerance
Tol b	-0.035 mm	Lower tolerance
≈m	5.7 kg/m	重量

**安装尺寸**

K <sub>1</sub>	M8	Thread
K1 M <sub>A</sub>	41 Nm	Tightening torque
d <sub>1</sub>	9 mm	Bore diameter

**尺寸**

l <sub>max</sub>	6,000 mm	Max length single piece guideway
a <sub>L max</sub>	71 mm	Distance
a <sub>L min</sub>	20 mm	Distance
a <sub>R max</sub>	71 mm	Distance
a <sub>R min</sub>	20 mm	Distance
j <sub>L</sub>	80 mm	Increment
h <sub>1</sub>	14.5 mm	length
Tol h <sub>1</sub>	0.5 mm	Upper tolerance
Tol h <sub>1</sub>	-0.5 mm	Distance Distance

**附加信息**

	KWVE35-B..	usable carriage(s)
	KUVE35-B..	usable linear systems