


**TKSD45** [↗](#)

修形轨道

技术信息

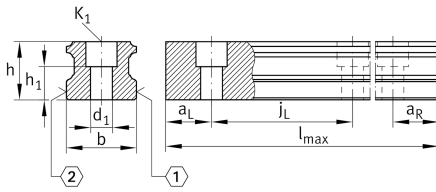

主要尺寸和性能数据

| | | |
|-------|-----------|-----------------|
| h | 37.2 mm | Height |
| b | 45 mm | Width |
| Tol b | -0.005 mm | Upper tolerance |
| Tol b | -0.035 mm | Lower tolerance |
| ≈m | 11.3 kg/m | 重量 |

安装尺寸

| | | |
|-------------------|---------|-----------------------------------|
| K ₁ | M12 | Fixing screws (DIN ISO 4762-12.9) |
| K1 M _A | 140 Nm | Tightening torque |
| d ₁ | 13.4 mm | bore diameter |

尺寸

| | | |
|--------------------|----------|----------------------------------|
| l _{max} | 5,985 mm | Max length single piece guideway |
| a _{L min} | 20 mm | Distance |
| a _{L max} | 94 mm | Distance |
| a _{R min} | 20 mm | Distance |
| a _{R max} | 94 mm | Distance |
| j _L | 105 mm | Increment |
| h ₁ | 18.7 mm | Length |
| Tol h ₁ | 0.5 mm | Upper tolerance |
| Tol h ₁ | -0.5 mm | Lower tolerance |

附加信息

| | | |
|--|-----------|-----------------------|
| | KWSE45... | usable carriage(s) |
| | KUSE45... | Usable linear systems |