


**TKSD20** [↗](#)

修形轨道

技术信息

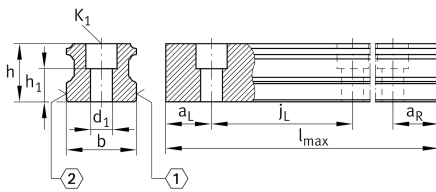

主要尺寸和性能数据

h	18 mm	Height
b	20 mm	Width
Tol b	-0.005 mm	Upper tolerance
Tol b	-0.035 mm	Lower tolerance
≈m	2.3 kg/m	重量

安装尺寸

K1 M _A	10 Nm	Tightening torque
d ₁	5.8 mm	bore diameter

尺寸

l _{max}	3,900 mm	Max length single piece guideway
a _{L min}	20 mm	Distance
a _{L max}	53 mm	Distance
a _{R min}	20 mm	Distance
a _{R max}	53 mm	Distance
j _L	60 mm	Increment
h ₁	9.6 mm	Length
Tol h ₁	0.5 mm	Upper tolerance
Tol h ₁	-0.5 mm	Lower tolerance

附加信息

	KWSE20...	usable carriage(s)
	KUSE20...	Usable linear systems