



FAG




N1010-D-K-TVP-SP-XL

圆柱滚子轴承

高精度圆柱滚子轴承N10..-K-TVP-SP，浮动轴承，带圆锥孔，锥度1:12，可分离，带保持架

X-life

技术信息

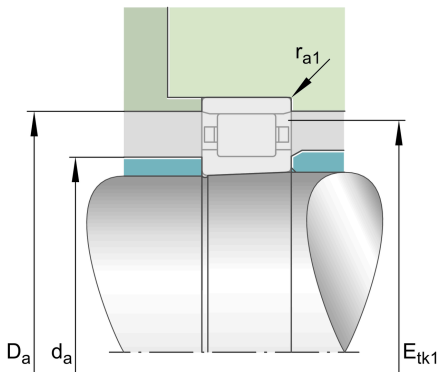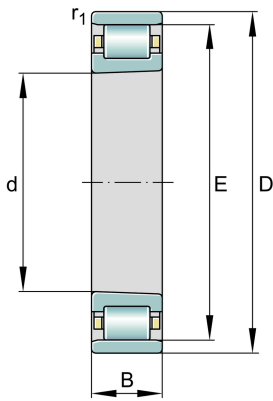

主要尺寸和性能数据

d	50 mm	内径
D	80 mm	外径
B	16 mm	宽度
C_r	36,500 N	基本额定动载荷，径向
C_{0r}	36,500 N	基本额定静载荷，径向
C_{ur}	5,700 N	疲劳极限载荷，径向
$n_{G\text{Grease}}$	14,200 1/min	脂润滑极限转速
$n_{G\text{Oil}}$	16,800 1/min	油润滑极限转速
$\approx m$	0.259 kg	重量

安装尺寸

d_a	58.5 mm	diameter shaft shoulder
	h12	diameter shaft shoulder tolerance
D_a	73.6 mm	diameter of housing shoulder
	H12	diameter of housing shoulder tolerance
$E_{tk1\text{nom}}$	71.2 mm	最小注入节圆直径
$r_{a1\text{max}}$	0.6 mm	最大凹穴半径

尺寸

$r_{1\text{min}}$	0.6 mm	最小倒角尺寸
s_1	3.1 mm	轴向位移
s_2	3.1 mm	轴向位移
E	72.5 mm	外圈滚道直径

温度范围

T_{min}	-30 °C	最低工作温度
T_{max}	120 °C	最高工作温度