


**TKSD30**

修形轨道

技术信息

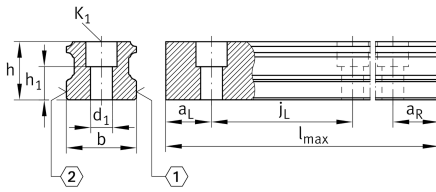

主要尺寸和性能数据

h	25 mm	Height
b	28 mm	Width
Tol b	-0.005 mm	Upper tolerance
Tol b	-0.035 mm	Lower tolerance
≈m	4.4 kg/m	重量

安装尺寸

K ₁	M8	Fixing screws (DIN ISO 4762-12.9)
K1 M _A	41 Nm	Tightening torque
d ₁	9 mm	bore diameter

尺寸

l _{max}	6,000 mm	Max length single piece guideway
a _{L min}	20 mm	Distance
a _{L max}	71 mm	Distance
a _{R min}	20 mm	Distance
a _{R max}	71 mm	Distance
j _L	80 mm	Increment
h ₁	12.5 mm	Length
Tol h ₁	0.5 mm	Upper tolerance
Tol h ₁	-0.5 mm	Lower tolerance

附加信息

	KWSE30...	usable carriage(s)
	KUSE30...	Usable linear systems